


# PROSHELL

POLISHED AND SATIN FINISH  
STAINLESS STEEL AISI 304/1.4301-V2A

**PROSHELL** is a cove-shaped profile in polished and satin finish stainless steel AISI 304/1.4301-V2A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

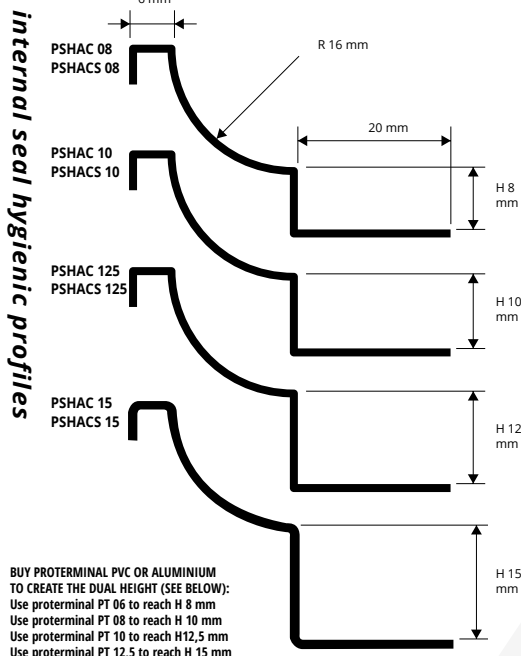

BUY PROTERMINAL PVC OR ALUMINIUM  
TO CREATE THE DUAL HEIGHT (SEE BELOW):  
Use proterminal PT 06 to reach H 8 mm  
Use proterminal PT 08 to reach H 10 mm  
Use proterminal PT 10 to reach H 12,5 mm  
Use proterminal PT 12,5 to reach H 15 mm

## EXAMPLES AND INSTRUCTIONS FOR LAYING



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A  
with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PSHAC 08	8		
PSHAC 10	10		
PSHAC 125	12,5		
PSHAC 15	15		




SATINATED STAINLESS STEEL AISI 304/1.4301-V2A  
with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PSHACS 08	8		
PSHACS 10	10		
PSHACS 125	12,5		
PSHACS 15	15		

Suitable for use in contact with foodstuffs.

## COLOURS




1. Choose "PROSHELL" according to the tile thickness and desired finish.  
(\*) 2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.  
(\*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

# PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND SATINATED STAINLESS STEEL


## INTERNAL CORNER

RPI...




## EXTERNAL CORNER

RPE...



## THREE WAYS JOINTS

RPT...



## PREWELDED CORNER - POLISHED STAINLESS STEEL

H 08 - 10 - 12,5 - 15 mm - pack. 10 Pcs

Article	Lmm		
RPI 8-10-125 (internal)	100		
RPI 15 (internal)	100		
RPE 8-10-125 (external)	100		
RPE 15 (external)	100		
RPT 8-10-125 (three-ways)	100		
RPT 15 (three-ways)	100		


Specify height of joint: E.g.: RPI 8 for H 8 mm.

## PREWELDED CORNER - SATINATED STAINLESS STEEL

H 08 - 10 - 12,5 - 15 mm - pack. 10 Pcs

Article	Lmm		
RPIS 8-10-125 (internal)	100		
RPIS 15 (internal)	100		
RPES 8-10-125 (external)	100		
RPES 15 (external)	100		
RPTS 8-10-125 (three-ways)	100		
RPTS 15 (three-ways)	100		

Specify height of joint: E.g.: RPIS 8 for H 8 mm.





PROTERMINAL, PROJOLLY SQUARE  
E PROJOLLY QUART  
(NO PROJOLLY)



To facilitate and complete the application of PROSHELL (PSH...) (in AISI 304-1.4301 stainless steel), joints and right (R) and left (L) caps are available to close the profile ends and provide a connection with ceramic tiles, brickwork, wooden floors, etc. The caps are made of painted plastic with: in the bright stainless steel effect and satin stainless steel effect.

## END CAPS

TPSH...



## JOINT

GISHN...



## CAPS AND JOINTS IN RIGID GREY PLASTIC

pack. 10 Pcs

Article		
TPSHAC caps R-L (poli. stainless steel effect)		
TPSHACS caps R-L (satin stainless steel effect)		
GISHN 08		
GISHN 10		
GISHN 125		
GISHN 15		

**PROSHELL** is a cove-shaped profile in polished and satin finish stainless steel AISI 316/1.4404-V4A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

## PROSHELL

POLISHED AND SATIN FINISH  
STAINLESS STEEL AISI 316/1.4404-V4A



**POLISHED STAINLESS STEEL AISI 316/1.4404-V4A**  
with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PSHACM 08	8		
PSHACM 10	10		
PSHACM 125	12,5		
PSHACM 15	15		



**SATINATED STAINLESS STEEL AISI 316/1.4404-V4A**  
with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm		
PSHACMS 08	8		
PSHACMS 10	10		
PSHACMS 125	12,5		
PSHACMS 15	15		

Suitable for use in contact with foodstuffs.

### COLOURS




1. Choose "PROSHELL" according to the tile thickness and desired finish. (\*) 2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (\*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

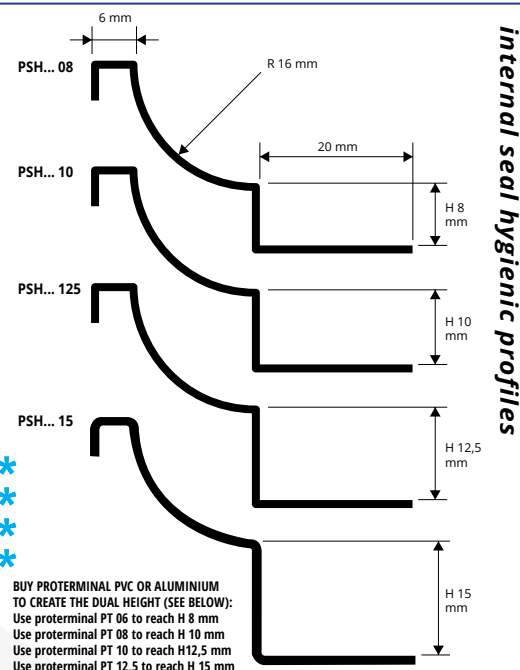

BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE BELOW):  
Use proterminal PT 06 to reach H 8 mm  
Use proterminal PT 08 to reach H 10 mm  
Use proterminal PT 10 to reach H 12,5 mm  
Use proterminal PT 12,5 to reach H 15 mm

### EXAMPLES AND INSTRUCTIONS FOR LAYING

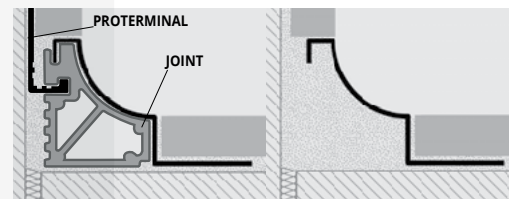

## PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND SATINATED STAINLESS STEEL

**PREWELDED CORNER - POLISHED STAINLESS STEEL**  
H 08 - 10 - 12,5 - 15 mm - pack. 10 Pcs



Article	Lmm		
RPIACM 8-10-125 (internal)	100		
RPIACM 15 (internal)	100		
RPEACM 8-10-125 (external)	100		
RPEACM 15 (external)	100		
RPTACM 8-10-125 (three ways)	100		
RPTACM 15 (three ways)	100		

Specify height of joint: E.g.: RPI 8 for H 8 mm.

**PREWELDED CORNER - SATINATED STAINLESS STEEL**  
H 08 - 10 - 12,5 - 15 mm - pack. 10 Pcs

Article	Lmm		
RPIACMS 8-10-125 (internal)	100		
RPIACMS 15 (internal)	100		
RPESACMS 8-10-125 (external)	100		
RPESACMS 15 (external)	100		
RPTSACMS 8-10-125 (three ways)	100		
RPTSACMS 15 (three ways)	100		

Specify height of joint: E.g.: RPIS 8 for H 8 mm.

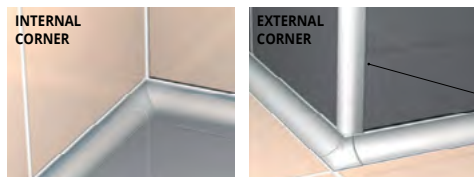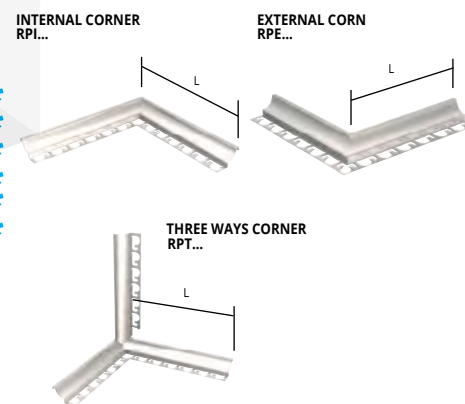



PROTERMINAL, PROJOLLY SQUARE  
E PROJOLLY QUART  
(NO PROJOLLY)



To facilitate and complete the application of PROSHELL (PSH...) (in AISI 316-1.4404 stainless steel), joints and right (R) and left (L) caps are available to close the profile ends and provide a connection with ceramic tiles, brickwork, wooden floors, etc. The caps are made of painted plastic with: in the bright stainless steel effect and satin stainless steel effect.

**CAPS AND JOINTS IN RIGID GREY PLASTIC**  
pack. 10 Pcs

Article		
TPSHAC caps R-L (poli. stainless steel effect)		
TPSHACS caps R-L (satin stainless steel effect)		
GISHN 08		
GISHN 10		
GISHN 125		
GISHN 15		

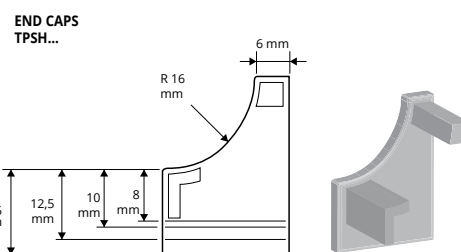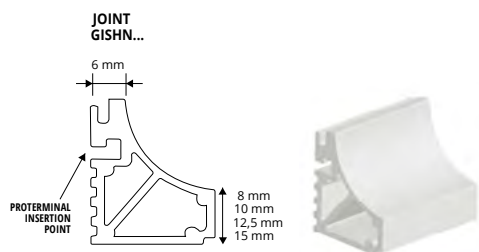

\* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

\*\* = Production on demand with minimum quantity of 20 pcs. Production delay 4/5 weeks. Price to be agreed