


PROLEVALL 29

ANODIZED ALUMINIUM WITH SELF-ADHESIVE AND PUNCHED


PROLEVALL 29 is a transition profile in anodized aluminium available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 29** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.



PLV... 29A
PLV... 299AS
PLV... 2910AS



PLV... 29F
PLV... 298FS
PLV... 299FS
PLV... 2910FS



transition profiles

ANODIZED ALUM. with adhesive thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm
PLV... 29A	5,5 X 29

ANODIZED ALUM. with adhesive thermo packed

bar length 0,83 lm - pack. 20 Pc



Article	H x L mm
PLV... 298AS	5,5 X 29

ANODIZED ALUM. with adhesive thermo packed

bar length 0,93 lm - pack. 20 Pc



Article	H x L mm
PLV... 299AS	5,5 X 29

ANODIZED ALUM. with adhesive thermo packed

bar length 1,03 lm - pack. 20 Pc



Article	H x L mm
PLV... 2910AS	5,5 X 29

ANODIZED ALUM. punched thermo packed

bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H x L mm
PLV... 29F	5,5 X 29

ANODIZED ALUM. punched with screws and screw anchors

thermo packed - bar length 0,83 lm - pack. 20 Pc



Article	H x L mm
PLV... 298FS	5,5 X 29

ANODIZED ALUM. punched with screws and screw anchors

thermo packed - bar length 0,93 lm - pack. 20 Pc



Article	H x L mm
PLV... 299FS	5,5 X 29


ANODIZED ALUM. punched with screws and screw anchors

thermo packed - bar length 1,03 lm - pack. 20 Pc



Article	H x L mm
PLV... 2910FS	5,5 X 29

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

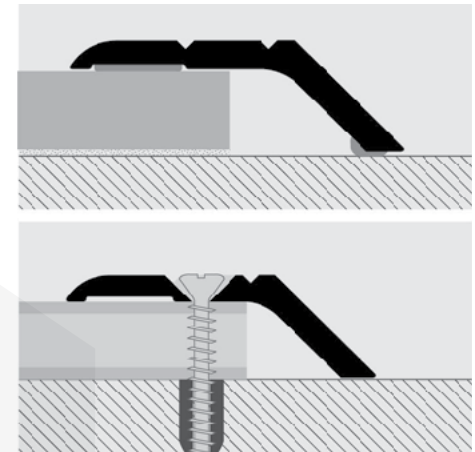


Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.

COLOURS



AVAILABLE MINIMUM QUANTITY 100 PCS by color and height



(Price to be agreed. Production delay 4/5 weeks)

PROLEVALL 33 is a transition profile in extruded polished brass, available in the self-adhesive or punched versions. It is used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. It joins and compensates a thickness between 4 and 6mm. **PROLEVALL 33** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 33

POLISHED BRASS WITH SELF-ADHESIVE AND PUNCHED

POLISHED BRASS with adhesive thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PLVOL 33A	5,5 X 33

POLISHED BRASS with adhesive thermo packed

bar length 0,83 lm - pack. 20 Pc



Article	H x L mm
PLVOL 338AS	5,5 X 33

POLISHED BRASS with adhesive thermo packed

bar length 0,93 lm - pack. 20 Pc



Article	H x L mm
PLVOL 339AS	5,5 X 33

POLISHED BRASS with adhesive thermo packed

bar length 1,03 lm - pack. 20 Pc



Article	H x L mm
PLVOL 3310AS	5,5 X 33

POLISHED BRASS punched thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H x L mm
PLVOL 33F	5,5 X 33

POLISHED BRASS punched with screws and screw anchors

thermo packed - bar length 0,83 lm - pack. 20 Pc



Article	H x L mm
PLVOL 338FS	5,5 X 33

POLISHED BRASS punched with screws and screw anchors

thermo packed - bar length 0,93 lm - pack. 20 Pc



Article	H x L mm
PLVOL 339FS	5,5 X 33


POLISHED BRASS punched with screws and screw anchors

thermo packed - bar length 1,03 lm - pack. 20 Pc




Article	H x L mm
PLVOL 3310FS	5,5 X 33

COLOURS



PLVOL 33A
PLVOL 338AS
PLVOL 339AS
PLVOL 3310AS



PLVOL 33F
PLVOL 338FS
PLVOL 339FS
PLVOL 3310FS



transition profiles

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the suitable profile and cut it to the necessary length.

Adhesive version

2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive.
4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.