


FKN 35

FOR FLOORS WITH PVC OR LINOLEUM – SURFACE FIXING

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

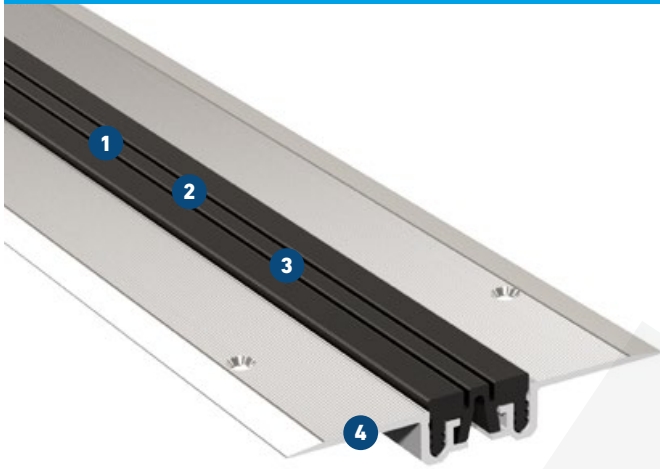

- 1 Perfectly designed insert**
3 mm high upstand can be welded with PVC floorings
- 2 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C)
- 3 Economical**
Insert replaceable at any time
- 4 Very flat design**
Perfect for surface fixing


Expansion joint cover	Total movement Δb_f [mm]	Visible width b_t [mm]	Joint width total b_t [mm]	Joint width required $b_f \text{ min}$ [mm]	for coverings thickness [mm]	Width of insert b_s [mm]	Installation height h [mm]	Thickness of alu side plates [mm]	Load bearing capacity*
FKN 35	10 (± 5)	30	112	35	3	30	13	2	pedestrians

* Light vehicles on request.

Production length: 4 m

Standard colours: black, grey, beige, brown

Wall connections: E3, E4

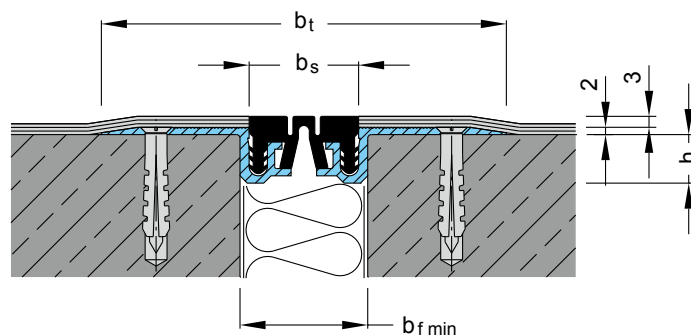

FTN 35

FOR FLOORS WITH CARPET – SURFACE FIXING

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



- 1 Perfectly designed insert**
5 mm high upstand in conjunction with carpets
- 2 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C)
- 3 Economical**
Insert replaceable at any time
- 4 Very flat design**
Perfect for surface fixing

Expansion joint cover	Total movement Δb_f [mm]	Visible width b_t [mm]	Joint width total b_t [mm]	Joint width required $b_f \text{ min}$ [mm]	for coverings thickness [mm]	Width of insert b_s [mm]	Installation height h [mm]	Thickness of alu side plates [mm]	Load bearing capacity*
FTN 35	10 (± 5)	30	112	35	5	30	13	2	pedestrians

* Light vehicles on request.

Production length: 4 m

Standard colours: black, grey, beige

Wall connections: E3, E4

